

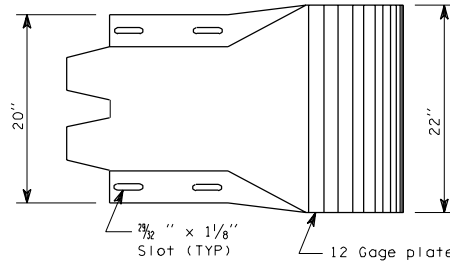
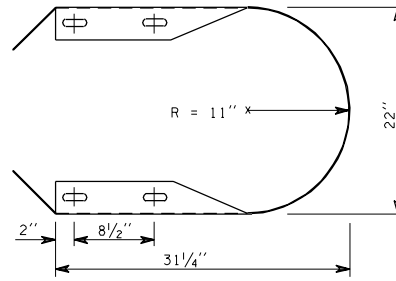



DESIGN C (THRIE BEAM)

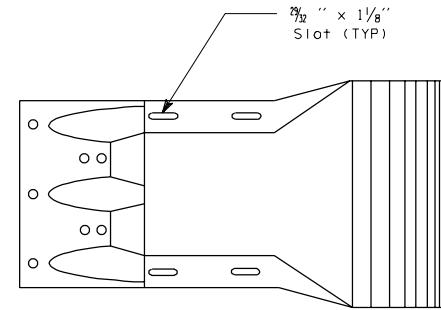

DESIGN D (THRIE BEAM)

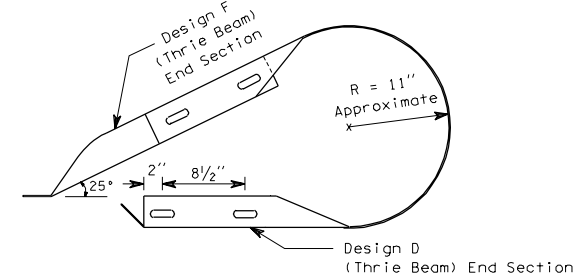

DESIGN G (THRIE BEAM)

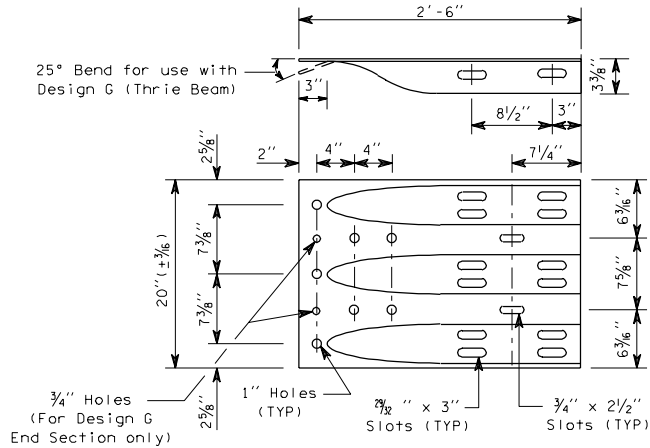

DESIGN F (THRIE BEAM)

NOTES

1. Bolts shall be high strength, $\frac{7}{8}$ ", with chemically bonded anchors.
2. In cases where Design F End Section is lapped on the outside of the guardrail, a galvanized 1" ID, 2" OD, 0.134" thick, narrow Type A Plain Washer or an anchor rail washer will be placed under the splice bolt heads.

THRIE BEAM END SECTIONS